

Owner: Kroghs A/S  
No.: MD-24079-EN  
Issued: 18-06-2024  
Valid to: 18-06-2029

3<sup>rd</sup> PARTY VERIFIED

**EPD**

VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804



**Owner of declaration**  
 Kroghs A/S  
 Klim Strandvej 284  
 9690 Fjerritslev, Denmark  
 VAT: 45571513



**Issued:**  
 18-06-2024

**Valid to:**  
 18-06-2029

**Programme**  
 EPD Danmark  
[www.epddanmark.dk](http://www.epddanmark.dk)



- Industry EPD
- Product EPD

**Basis of calculation**

This EPD is developed and verified in accordance with the European standard EN 15804:2012+A2:2019.

**Comparability**

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804:2012+A2:2019. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804:2012+A2:2019 and if the background systems are not based on the same database.

**Validity**

This EPD has been verified in accordance with ISO 14025:2010 and is valid for 5 years from the date of issue.

**Use**

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

**EPD type**

- Cradle-to-gate with modules C1-C4 and D
- Cradle-to-gate with options, modules C1-C4 and D
- Cradle-to-grave and module D
- Cradle-to-gate
- Cradle-to-gate with options

**Declared Products**

A total of 4 product groups for dry concrete products are declared in this EPD. The product groups represent products in the variations of element joint mortar.

Number of declared datasets/product variations: 4

**Production site**

Klim Strandvej 284,  
 9690 Fjerritslev, Danmark

**Use of Guarantees of Origin**

- No certificates used
- Electricity covered by GoO
- Biogas covered by GoO

**Declared/ functional unit**

1 ton of element joint mortar as dry concrete

**Year of production site data (A3)**

2023

**EPD version**

[1], May, 2024, Original version

CEN standard EN 15804:2012+A2:2019 serves as the core PCR

---

Independent verification of the declaration and data, according to EN ISO 14025:2010

internal                       external

---

Third party verifier:

*Linda Høiby, Life Cycle Assessment Consulting*

Martha Katrine Sørensen  
 EPD Danmark

**Life cycle stages and modules (MND = module not declared)**

Product			Construction process		Use							End of life				Beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
<b>X</b>	<b>X</b>	<b>X</b>	MND	MND	MND	MND	MND	MND	MND	MND	MND	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>

# Product Information

## Product Description:

Element joint mortar is used for wall joints and grouting under precast concrete panels, where they are a part of the load bearing construction. The declared products with a plastic flow property ("TIX") are used for vertical and horizontal joints without formwork. The products, which are flowing, is used for flow mouldings in corrugated pipes, flow mouldings of foundations under concrete columns and concrete elements, as well as for casting of concrete elements where the joint is form worked. The products are suitable for smaller mortar mixer pumps. Additional information regarding the declared products can be obtained on the website of the manufacturer:

- **Website:** <http://www.krogsh-as.dk/>

The declared products are split into 4 groups based on a mixed worst case between the environmental impact categories in module A1-A3 and C1-C4 according to the requirements specified in EN15804:2012 +A2:2019, and the guidelines concerning product groups provided by EPD Danmark. For each product group a mixed worst case represents the products group.

#	Product Name
1	0/1 Elementfugemørtel M35 Sommer
2	0/1 Elementfugemørtel A45 Sommer
	0/1 Elementfugemørtel Sommer
	0/1 Elementfugemørtel Flydende Sommer
	0/3 Flydemørtel Højstyrke Sommer/Vinter
3	0/1 Elementfugemørtel Vinter
	0/1 Elementfugemørtel Flydende Vinter
	0/1 Elementfugemørtel Højstyrke Sommer
	0/1 Elementfugemørtel Flydende Højstyrke Sommer
	0/1 Marine Mørtel kl. E
4	0/1 Elementfugemørtel T3 Vinter
	0/1 Elementfugemørtel Q50 Vinter
	0/1 kl. E Elementfugemørtel Flydende Højstyrke Vinter

In the table below the composition of materials in each product group is presented. The material composition is declared within a range due to variance between products in each group as well as business confidentiality concerns. Materials

account for 100% of the mass of the declared product.

#	Material	Weight-% of product
1	Cement	32-42%
	Sand	57-67%
	Additives	1-6%
2	Cement	36-45%
	Sand	51-61%
	Additives	1-11%
3	Cement	42-52%
	Sand	45-55%
	Additives	1-6%
4	Cement	45-55%
	Sand	43-53%
	Additives	1-6%

All products by Kroghs A/S are packaged in bags, of the following 3 sizes: 18.5 kg, 20 kg or 1200 kg. The packaging to product weight ratio is equal for all products according to the size of bags. The composition of the sales- and transport packaging of the 3 types of packaging per 1 ton of product is shown in the table below.

Type	Material	Packaging weight per declared unit [kg]	Weight-% of packaging [%]
18.5 kg	Euro pallet	22.5	86%
	LDPE	2.8	11%
	HDPE	1.0	4%
	<b>Total</b>	<b>26.3</b>	<b>100%</b>
20 kg	Euro pallet	20.8	86%
	LDPE	2.6	11%
	HDPE	0.9	4%
	<b>Total</b>	<b>24.3</b>	<b>100%</b>
1200 kg	Pallet	20.8	89%
	LDPE	1.5	6%
	HDPE	1.1	5%
	<b>Total</b>	<b>23.4</b>	<b>100%</b>

Biogenic carbon contents in packaging crossing the system boundary has been balanced out in

module A3 relative to the original uptake from sequestration.

#### **Representativity:**

This declaration, including data collection and the modelled foreground system, represents the production of the declared products of Kroghs A/S at the production site, Klim Strandvej 284, DK-9690 Fjerritslev, Denmark.

Product specific data are based on average values collected in the time period 01.10.2022 – 30.09.2023 and the representative geographical area of the study is Denmark. The products declared in this EPD covers 71% of the total products produced at Klim Strandvej 284, DK-9690 Fjerritslev, Denmark, in the data collection period.

Background data are based on the LCA-database, ecoinvent 3.9.1, release in 2022. The database adheres to the requirements of EN 15804:2012 +A2:2019 section 6.3.8.2, by being less than 10 years old. Generally, the used background data are of reasonably high quality, and the majority of the datasets are only a couple of years old. Where the data quality has not been sufficient,

#### **Picture of Product:**



adjustments has been made to get a more accurate representation of the geography and the technology.

#### **Essential characteristics:**

All products covered in this EPD adheres to the requirements for Compressive Strength in EN 206-1 and EN 206-1 DK

Additional technical information regarding the performance of declared products can be obtained by contacting the manufacturer or on the manufacturers website.

#### **Hazardous Substances:**

None of the declared products by Kroghs A/S contains hazardous substances listed on the "Candidate List of Substances of Very High Concern for authorisation":

- <http://echa.europa.eu/candidate-list-table>

#### **Expected Service Life (ESL):**

The declared products have an expected service life (ESL) of 100 years as specified in the cPCR, EN 16757:2022, Annex F, pp. 41-42.

# LCA Background

## Declared Unit (DU):

As prescribed by EN 16757:2022, Section 6.3.3, the declared unit (DU) is defined as:

- 1 ton of element join mortar as dry concrete

The LCI and LCIA results in this EPD hence relates to 1 ton of dry concrete. The following tables displays the conversion factors and relevant product densities.

Name	Value	Unit
Declared unit	1	ton
Conversion factor to 1 kg	0.001	-

#	Product Name	Water ratio [%]	Density* [kg/m <sup>3</sup> ]
1	0/1 Elementfugemørtel M35 Sommer	19.62%	2137

2	0/1 Elementfugemørtel A45 Sommer	19.20%	2177
	0/1 Elementfugemørtel Sommer	19.20%	2108
	0/1 Elementfugemørtel Flydende Sommer	18.92%	2198
	0/3 Flydemørtel Højstyrke Sommer/Vinter	10.43%	2336

3	0/1 Elementfugemørtel Vinter	21.19%	2111
	0/1 Elementfugemørtel Flydende Vinter	19.08%	2180
	0/1 Elementfugemørtel Højstyrke Sommer	19.03%	2163
	0/1 Elementfugemørtel Flydende Højstyrke Sommer	14.38%	2295
	0/1 Marine Mørtel kl. E	19.03%	2326

4	0/1 Elementfugemørtel T3 Vinter	21.03%	2135
	0/1 Elementfugemørtel Q50 Vinter	19.03%	2187
	0/1 kl. E Elementfugemørtel Flydende Højstyrke Vinter	15.41%	2269

\*Value after curing c.f. EN 1015-6:1999

## Product Category Rules (PCR):

This EPD is developed according to the core rules for the product category of construction products in EN 15804:2012+A2:2019, and the following complementary product category rules (cPCR):

- [EN 16757:2022 – Sustainability in construction works – Environmental product declarations – Product Category Rules for concrete and concrete elements](#)

## Guarantees of Origin:

The declared products are not manufactured using guarantees of origin (GoO) for electricity and process heat during the production stage

(A3) at the product site of Kroghs A/S at Klim Strandvej 284, 9690 Fjerritslev, Danmark.

## Foreground System:

The production at Kroghs A/S is modelled with site specific data. The electricity is modelled with residual mix for Denmark since no GoO-certificates have been purchased. The remaining activities outside of Kroghs A/S, has been modelled with data provided by Kroghs A/S, available EPDs for raw materials of cement from the suppliers, as well as relevant assumptions. For module C1-C4 and D for modelling the End-of-life scenario data has been utilised from the report *Miljøprojekt nr. 2217 - Affaldsstatistik 2020* by the Danish Environmental Agency (*Miljøstyrelsen, 2022a*), the report *Livscyklusvurdering (LCA) af konsekvenser ved selektiv nedrivning* by the Danish Environmental ministry (*Miljøstyrelsen, 2022b*), and the report *Nulspilprojektet – Genanvendelse af spildbeton fra egen produktion* by Technological institute (Teknologisk Institut, 2019)

## Background System:


The database, ecoinvent 3.9.1 (published in 12-2022) is utilized for the background system. As a result, both upstream- and downstream activities are based on average supply mixes for the specific country or region depending on the given dataset.

## Allocation Principles:

Allocation have been made in accordance with EN 15804:2012+A2:2019, Section 6.4.3. In this regard, allocation has been avoided to the extent that is possible by dividing unit processes into different sub-processes using site specific measurements. Energy at the production site, which cannot be directly attributed to a given product and thus sub-divided, has been allocated to by the production mass thereby reflecting the underlying physical relationship of products during the manufacturing stage (A3).

Energy consumption and waste associated with administrative activities has been allocated by economic values, as the difference in revenue from each production site operated by Kroghs A/S is greater than 25%, as described in EN 15804:2012+A2:2019, Section 6.4.3.2.

## Flow Diagram:

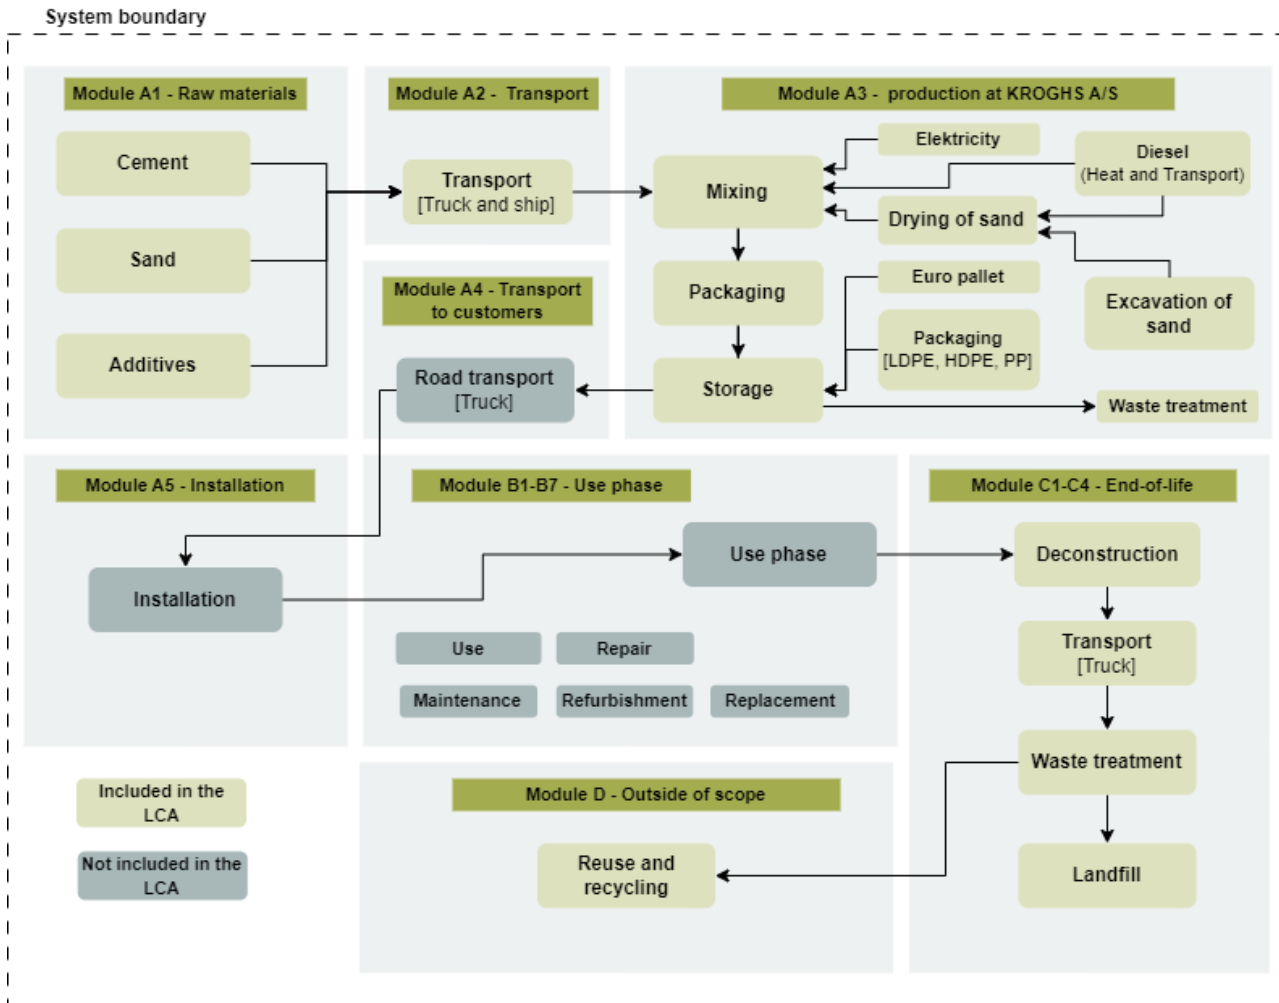

### System Boundary:

This EPD is based on a cradle-to-grave LCA and covers the life cycle modules A1-A3, C1-C4, and D, in which 100 weight-% of the product has been accounted for.

The general rules for the exclusion of inputs and outputs follows the requirements specified in EN 15804:2012+A2:2019, Section 6.3.6, where the total of neglected input flows per module shall be a maximum of 5% of energy usage and mass and 1% of renewable and non-renewable primary energy usage and mass for unit processes. In addition, particular care has been taken to include materials and flows known to have the potential to cause significant emissions into air, water and soil related to the environmental indicators assessed in this study. In this respect, conservative assumptions in combination with plausibility considerations and expert judgement

has been used to demonstrate compliance with this criterion.

### Product stage (A1-A3):

The product stage comprises the acquisition of raw materials, products and energy, transport to the production site, packaging and waste processing up to the "end-of-waste" state or final disposal. The LCA results are declared in aggregated form for the product stage, which means, that the sub-modules A1, A2 and A3 are declared as one module A1-A3.

All declared products consists of a mixture of cement, sand and additives. The raw materials are produced at external production sites in primarily Denmark, and a few materials are produced in Sweden, Holland, Czechia and Belgium. For modelling the production of cement, published and verified EPDs for the bought

materials have been utilized. For modelling the production of additives generic datasets have been utilized, which have been compared with information from Danish Concrete Association (*Dansk Betonforening & IDA, 2016*).

The sand is produced at internal production sites owned by Kroghs A/S, where site specific data has been applied. The sites are located in Denmark and the machinery for production consumes electricity and diesel. All raw materials are transported by truck and container ship. The production facility of Kroghs A/S, Fjerritslev is primarily utilized for weighing and mixing raw materials in the right amount, and to package the finished products. The machinery at the facility consumes electricity and the heating at the production hall is produced from diesel.

#### **End-of-Life (C1-C4):**

The end-of-life stage includes the deconstruction of the product from the building, the treatment of the deconstructed product and landfilling. The transport associated with the treatment is also included. A waste scenario is created based on data from the report *Miljøprojekt nr. 2217 - Affaldsstatistik 2020* Danish Environmental Agency (*Miljøstyrelsen, 2022a*), where 99% of the waste concrete is modelled to be recycle, and 1% is modelled to be landfilled. The recycled concrete is modelled to replace gravel in the creation of new concrete. This is deemed to be the most representative and likely end-of-life scenario. The declared products are dry concrete and must be mixed with water in a certain ratio to be able to harden. This results in a higher mass at the end-of-life stage (C1-C4), than the declared unit of 1 ton of dry concrete at the factory gate (A3). The additional weight at end-of-life stage and the environmental impacts associated with treating the concrete is included in this EPD and only contributed to the dry concrete and not the added water in the mixtures.

**C1:** A conservative assumption has been applied for the deconstruction of the building of 1.4 L of diesel per 1 ton of selectively deconstructed building material. Data is obtained from the report *Livscyklusvurdering (LCA) af konsekvenser ved selektiv nedrivning* by the Danish Environmental ministry (*Miljøstyrelsen, 2022b*).

**C2:** As Kroghs A/s primarily sells products to customer in Denmark, the waste concrete is also assumed to be treated in Denmark, and the estimated transport associated with waste treatment reflects this assumption. The modelled transport distances are based on data from ASRO (2008).

**C3:** For the modelling of waste treatment of deconstructed concrete data is used from Teknologisk Institut, 2019 – “*Nulspildsprojektet – Genanvendelse af spildbeton fra egen produktion*”, where 1 L of diesel is consumed for crushing 1 ton of concrete. Additionally, data concerning dust from crushing is also used from this report, where it is documented that 1 ton of concrete for crushing results in 1 ton of crushed concrete, and that no dust occurs (*Teknologisk Institut, 2019*). During waste treatment, the surface area of the concrete is increased when crushed, and is exposed to air. This results in recarbonatisation of the concrete, which is included in module C3. However, as the conditions for the crushed concrete, such as the exposure time, sizes of aggregates etc. is not known, a more simple formula is utilised for the calculations based on EN 16757:2022, Annex G.4:

$$CO_2 \text{ uptake} = \frac{5 \text{ kg } CO_2}{m^3 \text{ concrete}} \quad (\text{Eq 1})$$

**C4:** The 1% of the deconstructed concrete is sent to landfill (*Miljøstyrelsen, 2022a*). It is assumed that the concrete is inert waste, and is landfilled in Denmark, and the modelling of this scenario reflects Danish conditions.

#### **Re-use, recovery & recycling potential (D):**

The crushed concrete is assumed to be able to replace gravel as an input is the creation of new concrete, where no further treatment is needed after crushing. This is deemed to be the most representative and likely end-of-life scenario for crushed concrete. The recycling of concrete is assumed to take place in Denmark, and the avoided production of gravel is modelled to reflect Danish conditions.

# LCA Results

Due to the multiple declared products covered by this EPD, a series of results for each product group are presented. It should be recognized, that the results of the LCA are relative expressions and do not indicate the endpoints of environmental impacts, exceeding of thresholds, safety margins, or risks associated with the declared products. The results for each of the declared products can be found on the following pages:

- **Page 8-9:** [Product Group #01](#)
- **Page 10-11:** [Product Group #02](#)
- **Page 12-13:** [Product Group #03](#)
- **Page 14-15:** [Product Group #04](#)

## Product Group #01

ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE - PRODUCT GROUP 1							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	2.71E+02	6.20E+00	1.45E+01	1.52E+00	7.06E-02	-5.70E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	2.71E+02	6.20E+00	1.45E+01	1.52E+00	7.04E-02	-5.54E+00
GWP-biogenic	[kg CO <sub>2</sub> eq.]	-1.29E-01	1.42E-03	1.31E-02	1.02E-03	2.17E-04	-1.57E-01
GWP-luluc	[kg CO <sub>2</sub> eq.]	4.02E-02	6.98E-04	7.03E-03	4.98E-04	1.39E-05	-6.03E-03
ODP	[kg CFC 11 eq.]	9.57E-06	9.86E-08	3.15E-07	7.04E-08	2.44E-09	-8.41E-08
AP	[mol H <sup>+</sup> eq.]	9.92E-01	5.75E-02	4.72E-02	4.10E-02	4.54E-04	-4.17E-02
EP-freshwater	[kg P eq.]	1.37E-02	1.90E-04	1.01E-03	1.36E-04	3.29E-06	-1.97E-03
EP-marine	[kg N eq.]	2.20E-01	2.66E-02	1.62E-02	1.90E-02	1.98E-04	-1.15E-02
EP-terrestrial	[mol N eq.]	2.44E+00	2.90E-01	1.71E-01	2.07E-01	2.12E-03	-1.51E-01
POCP	[kg NMVOC eq.]	7.91E-01	8.57E-02	7.05E-02	6.12E-02	8.43E-04	-4.01E-02
ADPm <sup>1</sup>	[kg Sb eq.]	5.11E-04	2.16E-06	4.65E-05	1.55E-06	7.41E-08	-6.39E-05
ADPf <sup>1</sup>	[MJ]	2.19E+03	8.12E+01	2.05E+02	5.80E+01	1.79E+00	-6.75E+01
WDP <sup>1</sup>	[m <sup>3</sup> world eq. deprived]	2.15E+01	1.75E-01	8.36E-01	1.25E-01	6.46E-03	-4.76E+00
Caption	GWP-total = Globale Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water depletion potential						
	The numbers are declared in scientific notation, e.g. 1.95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 1							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	1.38E-05	1.60E-06	1.15E-06	1.14E-06	1.15E-08	-7.61E-07
IRP <sup>2</sup>	[kBq U235 eq.]	8.08E+00	3.85E-02	2.74E-01	2.75E-02	1.70E-03	-4.97E-01
ETP-fw <sup>1</sup>	[CTUe]	2.88E+03	3.88E+01	1.01E+02	2.77E+01	7.55E-01	-3.35E+01
HTP-c <sup>1</sup>	[CTUh]	1.76E-07	1.90E-09	6.57E-09	1.36E-09	2.39E-11	-9.00E-09
HTP-nc <sup>1</sup>	[CTUh]	1.09E-06	1.32E-08	1.44E-07	9.43E-09	3.14E-10	-8.35E-08
SQP <sup>1</sup>	-	8.51E+02	5.47E+00	1.22E+02	3.91E+00	3.69E+00	-1.44E+02
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)						
	The numbers are declared in scientific notation, e.g. 1.95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						
	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.						



**RESOURCE USE PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 1**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	7.16E+02	4.62E-01	3.18E+00	3.30E-01	3.56E-02	-1.93E+01
PERM	[MJ]	1.21E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	[MJ]	7.16E+02	4.62E-01	3.18E+00	3.30E-01	3.56E-02	-1.93E+01
PENRE	[MJ]	2.03E+03	8.12E+01	2.05E+02	5.80E+01	1.79E+00	-6.75E+01
PENRM	[MJ]	1.58E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	2.19E+03	8.12E+01	2.05E+02	5.80E+01	1.79E+00	-6.75E+01
SM	[kg]	1.19E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	1.14E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	1.91E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	1.37E+00	6.37E-03	2.92E-02	4.55E-03	2.09E-03	-4.29E-01
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**WASTE CATEGORIES AND OUTPUT FLOWS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 1**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	5.17E+00	5.46E-04	1.31E-03	3.90E-04	8.74E-06	-4.31E-04
NHWD	[kg]	1.88E+02	1.16E-01	1.00E+01	1.23E+03	1.24E+01	-1.08E+00
RWD	[kg]	6.42E-03	8.89E-06	6.66E-05	6.35E-06	3.87E-07	-1.17E-04
CRU	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	[kg]	1.87E-04	0.00E+00	0.00E+00	1.23E+03	0.00E+00	0.00E+00
MER	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**BIOGENIC CARBON CONTENT PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 1**

Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0.00E+00
Biogenic carbon content in accompanying packaging	[kg C]	3.86E-01
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

## Product Group #02

ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE - PRODUCT GROUP 2							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	4.53E+02	6.17E+00	1.44E+01	1.47E+00	7.02E-02	-5.67E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	4.52E+02	6.17E+00	1.44E+01	1.47E+00	7.00E-02	-5.51E+00
GWP-biogenic	[kg CO <sub>2</sub> eq.]	1.25E+00	1.42E-03	1.30E-02	1.01E-03	2.16E-04	-1.56E-01
GWP-luluc	[kg CO <sub>2</sub> eq.]	6.64E-02	6.94E-04	6.99E-03	4.96E-04	1.38E-05	-6.00E-03
ODP	[kg CFC 11 eq.]	1.14E-05	8.85E-08	2.83E-07	6.32E-08	2.19E-09	-7.55E-08
AP	[mol H <sup>+</sup> eq.]	2.26E+00	5.16E-02	4.23E-02	3.68E-02	4.08E-04	-3.74E-02
EP-freshwater	[kg P eq.]	1.88E-02	1.71E-04	9.09E-04	1.22E-04	2.95E-06	-1.77E-03
EP-marine	[kg N eq.]	3.64E-01	2.39E-02	1.46E-02	1.71E-02	1.78E-04	-1.03E-02
EP-terrestrial	[mol N eq.]	4.03E+00	2.60E-01	1.54E-01	1.86E-01	1.91E-03	-1.36E-01
POCP	[kg NMVOC eq.]	1.74E+00	7.69E-02	6.32E-02	5.50E-02	7.56E-04	-3.60E-02
ADPm <sup>1</sup>	[kg Sb eq.]	1.37E-03	1.94E-06	4.17E-05	1.39E-06	6.65E-08	-5.73E-05
ADPf <sup>1</sup>	[MJ]	3.14E+03	7.29E+01	1.84E+02	5.20E+01	1.60E+00	-6.05E+01
WDP <sup>1</sup>	[m <sup>3</sup> world eq. deprived]	4.04E+01	1.57E-01	7.50E-01	1.12E-01	5.79E-03	-4.27E+00
Caption	GWP-total = Globale Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water depletion potential						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 2							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	3.95E-05	1.44E-06	1.03E-06	1.03E-06	1.03E-08	-6.83E-07
IRP <sup>2</sup>	[kBq U235 eq.]	7.33E+00	3.46E-02	2.46E-01	2.47E-02	1.53E-03	-4.46E-01
ETP-fw <sup>1</sup>	[CTUe]	9.79E+03	3.48E+01	9.08E+01	2.49E+01	6.78E-01	-3.01E+01
HTP-c <sup>1</sup>	[CTUh]	1.74E-06	1.70E-09	5.90E-09	1.22E-09	2.14E-11	-8.08E-09
HTP-nc <sup>1</sup>	[CTUh]	3.91E-06	1.18E-08	1.30E-07	8.46E-09	2.82E-10	-7.50E-08
SQP <sup>1</sup>	-	1.59E+03	4.91E+00	1.10E+02	3.51E+00	3.32E+00	-1.29E+02
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						
	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.						

**RESOURCE USE PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 2**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	4.53E+02	4.15E-01	2.86E+00	2.96E-01	3.19E-02	-1.73E+01
PERM	[MJ]	1.21E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	[MJ]	4.65E+02	4.15E-01	2.86E+00	2.96E-01	3.19E-02	-1.73E+01
PENRE	[MJ]	6.22E+03	7.29E+01	1.84E+02	5.20E+01	1.60E+00	-6.05E+01
PENRM	[MJ]	1.97E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	6.41E+03	7.29E+01	1.84E+02	5.20E+01	1.60E+00	-6.05E+01
SM	[kg]	2.33E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	2.12E+00	5.72E-03	2.62E-02	4.09E-03	1.88E-03	-3.85E-01
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**WASTE CATEGORIES AND OUTPUT FLOWS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 2**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	1.96E+01	4.90E-04	1.17E-03	3.50E-04	7.84E-06	-3.87E-04
NHWD	[kg]	4.52E+02	1.04E-01	8.99E+00	1.11E+03	1.12E+01	-9.72E-01
RWD	[kg]	3.27E-03	7.98E-06	5.98E-05	5.70E-06	3.48E-07	-1.05E-04
CRU	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	[kg]	4.70E-01	0.00E+00	0.00E+00	1.11E+03	0.00E+00	0.00E+00
MER	[kg]	5.51E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**BIOGENIC CARBON CONTENT PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 2**

Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0.00E+00
Biogenic carbon content in accompanying packaging	[kg C]	3.86E-01
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

## Product Group #03

ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE - PRODUCT GROUP 3							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	5.04E+02	6.16E+00	1.44E+01	1.57E+00	7.01E-02	-5.66E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	5.03E+02	6.16E+00	1.44E+01	1.56E+00	6.99E-02	-5.50E+00
GWP-biogenic	[kg CO <sub>2</sub> eq.]	1.15E+00	1.41E-03	1.30E-02	1.01E-03	2.15E-04	-1.56E-01
GWP-luluc	[kg CO <sub>2</sub> eq.]	9.71E-02	6.93E-04	6.98E-03	4.95E-04	1.38E-05	-5.99E-03
ODP	[kg CFC 11 eq.]	9.12E-06	9.26E-08	2.96E-07	6.61E-08	2.29E-09	-7.90E-08
AP	[mol H <sup>+</sup> eq.]	1.62E+00	5.71E-02	4.69E-02	4.08E-02	4.51E-04	-4.14E-02
EP-freshwater	[kg P eq.]	2.18E-02	1.89E-04	1.01E-03	1.35E-04	3.26E-06	-1.96E-03
EP-marine	[kg N eq.]	4.16E-01	2.72E-02	1.65E-02	1.94E-02	2.02E-04	-1.17E-02
EP-terrestrial	[mol N eq.]	3.55E+00	2.88E-01	1.70E-01	2.05E-01	2.11E-03	-1.50E-01
POCP	[kg NMVOC eq.]	1.11E+00	8.52E-02	7.00E-02	6.08E-02	8.37E-04	-3.98E-02
ADPm <sup>1</sup>	[kg Sb eq.]	1.50E-03	2.15E-06	4.61E-05	1.54E-06	7.37E-08	-6.35E-05
ADPf <sup>1</sup>	[MJ]	2.70E+03	8.06E+01	2.04E+02	5.76E+01	1.78E+00	-6.70E+01
WDP <sup>1</sup>	[m <sup>3</sup> world eq. deprived]	4.36E+01	1.74E-01	8.30E-01	1.24E-01	6.41E-03	-4.73E+00
Caption	GWP-total = Globale Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water depletion potential						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 3							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	2.01E-05	1.59E-06	1.14E-06	1.14E-06	1.14E-08	-7.56E-07
IRP <sup>2</sup>	[kBq U235 eq.]	7.03E+00	3.83E-02	2.73E-01	2.73E-02	1.69E-03	-4.93E-01
ETP-fw <sup>1</sup>	[CTUe]	4.10E+03	3.85E+01	1.01E+02	2.75E+01	7.50E-01	-3.33E+01
HTP-c <sup>1</sup>	[CTUh]	3.46E-07	1.89E-09	6.53E-09	1.35E-09	2.37E-11	-8.94E-09
HTP-nc <sup>1</sup>	[CTUh]	2.27E-06	1.31E-08	1.43E-07	9.36E-09	3.12E-10	-8.30E-08
SQP <sup>1</sup>	-	1.26E+03	5.43E+00	1.21E+02	3.88E+00	3.67E+00	-1.43E+02
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						
	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.						

**RESOURCE USE PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 3**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	2.92E+02	4.59E-01	3.16E+00	3.28E-01	3.53E-02	-1.92E+01
PERM	[MJ]	1.21E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	[MJ]	2.92E+02	4.59E-01	3.16E+00	3.28E-01	3.53E-02	-1.92E+01
PENRE	[MJ]	2.70E+03	8.06E+01	2.04E+02	5.76E+01	1.78E+00	-6.70E+01
PENRM	[MJ]	1.58E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	2.70E+03	8.06E+01	2.04E+02	5.76E+01	1.78E+00	-6.70E+01
SM	[kg]	2.30E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	1.74E+00	6.33E-03	2.90E-02	4.52E-03	2.08E-03	-4.26E-01
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**WASTE CATEGORIES AND OUTPUT FLOWS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 3**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	1.13E+01	5.43E-04	1.30E-03	3.88E-04	8.68E-06	-4.28E-04
NHWD	[kg]	2.29E+02	1.18E-01	1.02E+01	1.26E+03	1.27E+01	-1.10E+00
RWD	[kg]	3.99E-03	8.84E-06	6.62E-05	6.31E-06	3.85E-07	-1.17E-04
CRU	[kg]	9.43E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	[kg]	2.23E+00	0.00E+00	0.00E+00	1.16E+03	0.00E+00	0.00E+00
MER	[kg]	1.02E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**BIOGENIC CARBON CONTENT PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 3**

Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0.00E+00
Biogenic carbon content in accompanying packaging	[kg C]	3.86E-01
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

## Product Group #04

ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE - PRODUCT GROUP 4							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	5.36E+02	6.31E+00	1.47E+01	1.72E+00	7.19E-02	-5.80E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	5.35E+02	6.31E+00	1.47E+01	1.72E+00	7.16E-02	-5.64E+00
GWP-biogenic	[kg CO <sub>2</sub> eq.]	3.62E-01	1.45E-03	1.33E-02	1.03E-03	2.21E-04	-1.60E-01
GWP-luluc	[kg CO <sub>2</sub> eq.]	8.96E-02	7.10E-04	7.15E-03	5.07E-04	1.41E-05	-6.14E-03
ODP	[kg CFC 11 eq.]	1.27E-05	1.00E-07	3.20E-07	7.17E-08	2.48E-09	-8.56E-08
AP	[mol H <sup>+</sup> eq.]	2.40E+00	5.85E-02	4.80E-02	4.18E-02	4.63E-04	-4.24E-02
EP-freshwater	[kg P eq.]	2.16E-02	1.89E-04	1.01E-03	1.35E-04	3.26E-06	-1.96E-03
EP-marine	[kg N eq.]	4.07E-01	2.71E-02	1.65E-02	1.94E-02	2.02E-04	-1.17E-02
EP-terrestrial	[mol N eq.]	4.25E+00	2.95E-01	1.74E-01	2.10E-01	2.16E-03	-1.54E-01
POCP	[kg NMVOC eq.]	1.74E+00	8.73E-02	7.17E-02	6.23E-02	8.58E-04	-4.08E-02
ADPm <sup>1</sup>	[kg Sb eq.]	1.66E-03	2.20E-06	4.73E-05	1.57E-06	7.55E-08	-6.50E-05
ADPf <sup>1</sup>	[MJ]	3.33E+03	8.26E+01	2.09E+02	5.90E+01	1.82E+00	-6.87E+01
WDP <sup>1</sup>	[m <sup>3</sup> world eq. deprived]	4.58E+01	1.74E-01	8.30E-01	1.24E-01	6.41E-03	-4.73E+00
Caption	GWP-total = Globale Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water depletion potential						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 4							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	3.84E-05	1.63E-06	1.17E-06	1.16E-06	1.17E-08	-7.75E-07
IRP <sup>2</sup>	[kBq U235 eq.]	8.17E+00	3.92E-02	2.79E-01	2.80E-02	1.73E-03	-5.05E-01
ETP-fw <sup>1</sup>	[CTUe]	9.73E+03	3.95E+01	1.03E+02	2.82E+01	7.69E-01	-3.41E+01
HTP-c <sup>1</sup>	[CTUh]	1.58E-06	1.93E-09	6.69E-09	1.38E-09	2.43E-11	-9.16E-09
HTP-nc <sup>1</sup>	[CTUh]	4.03E-06	1.34E-08	1.47E-07	9.60E-09	3.20E-10	-8.50E-08
SQP <sup>1</sup>	-	1.58E+03	5.57E+00	1.24E+02	3.98E+00	3.76E+00	-1.47E+02
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.						
	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.						

**RESOURCE USE PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 4**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	4.94E+02	4.70E-01	3.24E+00	3.36E-01	3.62E-02	-1.96E+01
PERM	[MJ]	1.29E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	[MJ]	4.95E+02	4.70E-01	3.24E+00	3.36E-01	3.62E-02	-1.96E+01
PENRE	[MJ]	6.03E+03	8.26E+01	2.09E+02	5.90E+01	1.82E+00	-6.87E+01
PENRM	[MJ]	2.01E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	6.08E+03	8.26E+01	2.09E+02	5.90E+01	1.82E+00	-6.87E+01
SM	[kg]	2.60E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	1.99E+00	6.49E-03	2.97E-02	4.63E-03	2.13E-03	-4.37E-01
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**WASTE CATEGORIES AND OUTPUT FLOWS PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 4**

Parameter	Unit	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	2.11E+01	5.56E-04	1.33E-03	3.97E-04	8.89E-06	-4.39E-04
NHWD	[kg]	4.78E+02	1.18E-01	1.02E+01	1.25E+03	1.27E+01	-1.10E+00
RWD	[kg]	4.13E-03	9.05E-06	6.78E-05	6.47E-06	3.94E-07	-1.19E-04

CRU	[kg]	4.25E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	[kg]	2.25E+00	0.00E+00	0.00E+00	1.22E+03	0.00E+00	0.00E+00
MER	[kg]	5.04E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EEE	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EET	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy						
	The numbers are declared in scientific notation, e.g. 1,95E+02. This number can also be written as: 1,95*10 <sup>2</sup> or 195, while 1,12E-11 is the same as 1,12*10 <sup>-11</sup> or 0,0000000000112.						

**BIOGENIC CARBON CONTENT PER 1 TON OF DRY CONCRETE – PRODUCT GROUP 4**

Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0.00E+00
Biogenic carbon content in accompanying packaging	[kg C]	3.86E-01
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

## Additional Information

### Interpretation:

Overall, the supply of raw materials (A1) constitutes the most significant contribution to the environmental impact of the declared products within the defined system boundary. This is partly due to the relatively low energy consumption, and thus limited direct emissions, associated with the production of dry concrete at the production stage (A3), which is mainly done by mixing materials according to a prescription. Upstream emissions associated with each supply chain of raw materials and the specific material mix are thus the determinants of the environmental impact of each product – especially cement, which makes the main contribution to the majority of EF impact categories.

### Technical Information on Scenarios:

End-of-Life (C1-C4)	Value	Unit
Collected separately	1	ton
Collected with mixed waste	0	ton
For reuse	0	ton
For recycling	0,99	ton
For energy recovery	0	ton
For final disposal	0,01	ton

Reuse, Recovery and Recycling potential (D)	Value	Unit
Recovered material	0.99	ton
Energy recovery from waste incineration	0	MJ

### Indoor Air:



*The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on the relevant measurements are not available. Read more in EN 15804:2012+A2:2019, Section 7.4.1.*

### Soil and Water:

*The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on the relevant measurements are not available. Read more in EN 15804:2012+A2:2019 Section 7.4.2.*



## References

<b>Publisher</b>	 www.epddanmark.dk Template version 2023.2
<b>Programme operator</b>	Danish Technological Institute Gregersensvej DK-2630 Taastrup <a href="http://www.teknologisk.dk">http://www.teknologisk.dk</a>
<b>LCA-practitioner</b>	 NIRAS A/S Østre Havnegade 12 DK-9000, Aalborg <a href="http://www.niras.dk">http://www.niras.dk</a>  Asbjørn Ulbjerg Bundgaard ( <a href="mailto:asbu@niras.dk">asbu@niras.dk</a> ) Nanna Filskov Theilgaard ( <a href="mailto:nath@niras.dk">nath@niras.dk</a> )
<b>LCA software / background data</b>	SimaPro 9.5 / ecoinvent 3.9.1
<b>3<sup>rd</sup> party verifier</b>	Linda Høibye, Life Cycle Assessment Consulting

### General programme instructions

General Programme Instructions, version 2.0, spring 2020  
[www.epddanmark.dk](http://www.epddanmark.dk)

### ecoinvent 3.9.1, 2022

<http://www.ecoinvent.org/the-ecoinvent-database/>

### PR-24025-DA

Project Report for Kroghs A/S, NIRAS A/S (May 2024)

### EN 15804:2012+A2:2019

Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products

### CEN/TC 16970

Sustainability of construction works – Guidance for the implementation of EN 15804

### EN 16757:2022

EN 16757:2022 – "Bæredygtighed inden for byggeri og anlæg – Miljøvaredeklarationer – Produktkategoriregler for beton og Betonelementer"

**EN 15942**

DS/EN 15942:2011 – " Sustainability of construction works – Environmental product declarations – Communication format business-to-business"

**ISO 14025**

DS/EN ISO 14025:2010 – " Environmental labels and declarations – Type III environmental declarations – Principles and procedures"

**ISO 14040:2008**

DS/EN ISO 14040:2008 – " Environmental management – Life cycle assessment – Principles and framework"

**ISO 14044:2008**

DS/EN ISO 14044:2008 – " Environmental management – Life cycle assessment – Requirements and guidelines"

**Miljøstyrelsen, 2022a**, Last visited: 26-02-2024

[Miljøprojekt nr. 2217 - Affaldsstatistik 2020](#)

**Miljøstyrelsen, 2022b** Last visited: 26-02-2024

[Miljøprojekt nr. 2185 – Livscyklusvurdering \(LCA\) af konsekvenser ved selektiv nedrivning](#)

**Dansk Betonforening & IDA, 2016**

<https://betonhaandbogen.dk/>

**Teknologisk Institut, 2019**

<https://www.teknologisk.dk/projekter/nulspilprojektet/40019>

**ASRO Third Party Report - Allacker, K. and De Troyer, F. 2008**

ArDuCoKlei-project: Levenscyclusanalyse (LCA) van "wieg-tot-graf" binnenwand en buitenwand